


LTS-31 CRANK

Complete Portable Trussing System WITH CRANK

ASSEMBLE MANUSL

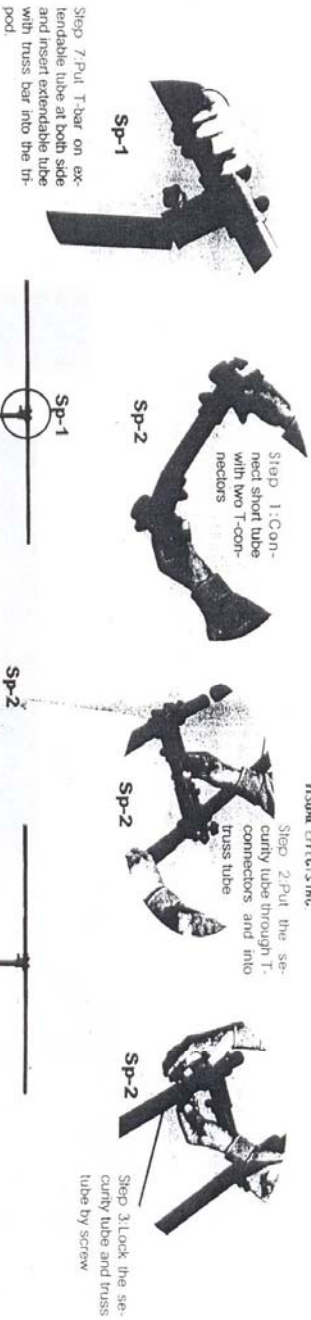

This trussing system offer easy set-up and high stability. It complete with two tripods that telescope to nine feet featuring two locking grooved pins. Also included are two T-bars and two five foot truss that securely lock together to create 10 foot trussing span or they can be used separately. This trussing system is excellent for mobile DJs, bands, and rentals.

VISUAL EFFECTS INC. 3946 Merritt Avenue, B-1, Bionik, NY 110466
 Phone: 718-324-0011, 800-422-3639 Fax: 718-324-0100
 Email: info@visualeffectsinc.com Website: www.visualeffectsinc.com

Note: The security tube is very important. Installation must be completed.


Specifications:
 Weight: 24KG
 Load Capacity: 100KG guaranteed

LTS-31 CRANK

Complete Portable Trussing System WITH CRANK



ASSEMBLE MANUSL

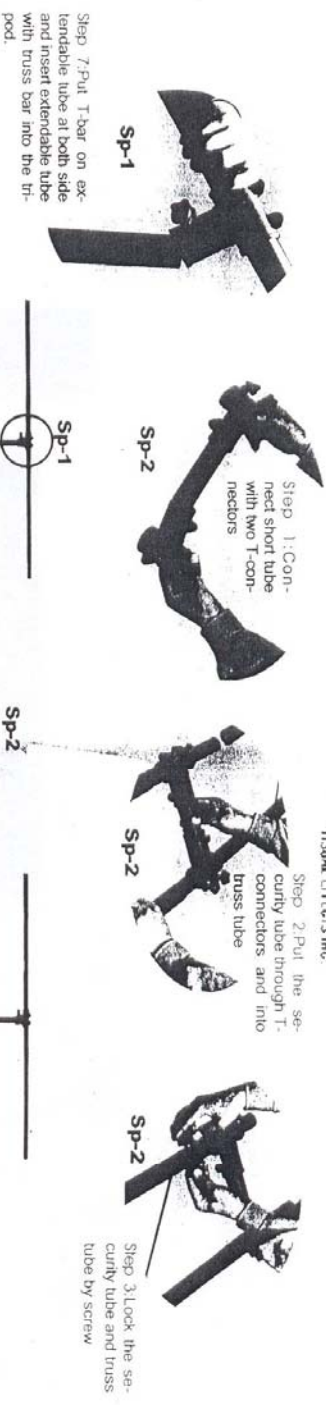

Step 7: Put T-bar on extendable tube at both side and insert extendable tube with truss bar into the tripod.



Step 1: Connect short tube with two T-connectors



Step 2: Put the securi tube through T-connectors and into truss tube



Step 3: Lock the securi tube and truss tube by screw



Step 4: Lock the another truss tube and securi tube at same way



Step 5: This picture means you have successfully connected two truss bar



Step 8: Before you use crank, pls loose the screw if you don't use



Details

This trussing system offer easy set-up and high stability. It complete with two tripods that telescope to nine feet featuring two locking grooved pins. Also included are two T-bars and two five foot truss that securely lock together to create 10 foot trussing span or they can be used separately. This trussing system is excellent for mobile DJs, bands, and rentals.

VISUAL EFFECTS INC. 3946 Merritt Avenue • BIRONG, NY 11465
 Phone: 718-324-0001, 800-422-3639 Fax: 718-324-0100
 Email: info@visual-effects.com Website: www.visual-effects.com

Specifications:
 Weight: 24KG
 Load Capacity: 100KG guaranteed.

Note: The security tube is very important, installation must be completed.